



MODULAR DESIGN

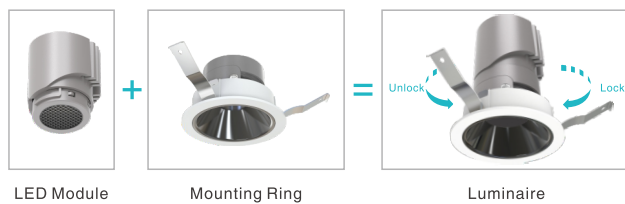


DIMENSION


EM060-EF61RA01




EM060-EF61RF01




EM060-EF61RA01T




EM060-EF61RF01T




EM060-EF61SA01




EM060-EF61SA01T




EM070-EF71RA01




EM070-EF71RF01




EM070-EF71RA01T



EM070-EF71RF01T



EM070-EF71SA01



DESCRIPTION

ELLA-Hotel series is not only an aesthetic designed downlight, but also release high quality light thanks to combination of a precision light beam lens and secondary reflector. The luminaires blend elegantly into the ceiling layout and embody the philosophy of "light instead of luminaires." Super modular design, round as well as square with adjustable and fixed options, in various wattages, ELLA-hotel series is a great choice to get a unified impression in one environment.

FEATURES

- Elegant & compact in its style, versatile in its using.
- Precise light control, 15°, 24°, 38°, 55° beam lens options.
- Interchangeable different color secondary reflectors for anti-glare and decorative function.
- Super modular design, replacing LED module, mounting ring, beam lens, honeycomb filter and secondary reflectors without any needs for tools.
- 355° rotation and 30° tilt.
- Anti-glare accessories provide maximum visual comfort.
- Ip20 is standard, IP44 is optional.

SPECIFICATION

INPUT VOLTAGE 220-240V / 100-120V / 100-277V AC, 50-60Hz

DIMMABLE On-off, Phase dim, 1-10V, DALI



BEAM ANGLE 15°, 24°, 38°, 55°

HOUSING COLOR Black

OPERATING TEMPERATURE RANGE -20~+40°C

MODEL NUMBER	POWER	COLOR TEMP	LUMINOUS FLUX(Lm) CRI80+	LUMINOUS FLUX(Lm)±5% CRI90+	BEAM ANGLE
EM060-EF61RA01	9W	2700K 3000K	869 lm 936 lm	695 lm 749 lm	38°
EM060-EF61SA01	9W	2700K 3000K	836 lm 904 lm	669 lm 723 lm	38°
EM060-EF61RF01	9W	2700K 3000K	835 lm 903 lm	668 lm 722 lm	38°
EM060-EF61RA01	13W	2700K 3000K	1159 lm 1256 lm	927 lm 1005 lm	38°
EM060-EF61SA01	13W	2700K 3000K	1112 lm 1211 lm	890 lm 969 lm	38°
EM060-EF61RF01	13W	2700K 3000K	1111 lm 1209 lm	889 lm 967 lm	38°
EM070-EF71RA01	20W	2700K 3000K	1736 lm 1893 lm	1389 lm 1514 lm	24°
EM070-EF71SA01	20W	2700K 3000K	2229 lm 2323 lm	1783 lm 1858 lm	38°
EM070-EF71RF01	20W	2700K 3000K	1824 lm 1981 lm	1459 lm 1585 lm	24°
EM070-EF71RA01	25W	2700K 3000K	2075 lm 2263 lm	1660 lm 1810 lm	24°
EM070-EF71SA01	25W	2700K 3000K	2654 lm 2765 lm	2123 lm 2212 lm	38°
EM070-EF71RF01	25W	2700K 3000K	2180 lm 2368 lm	1744 lm 1894 lm	24°


LIGHT DISTRIBUTION

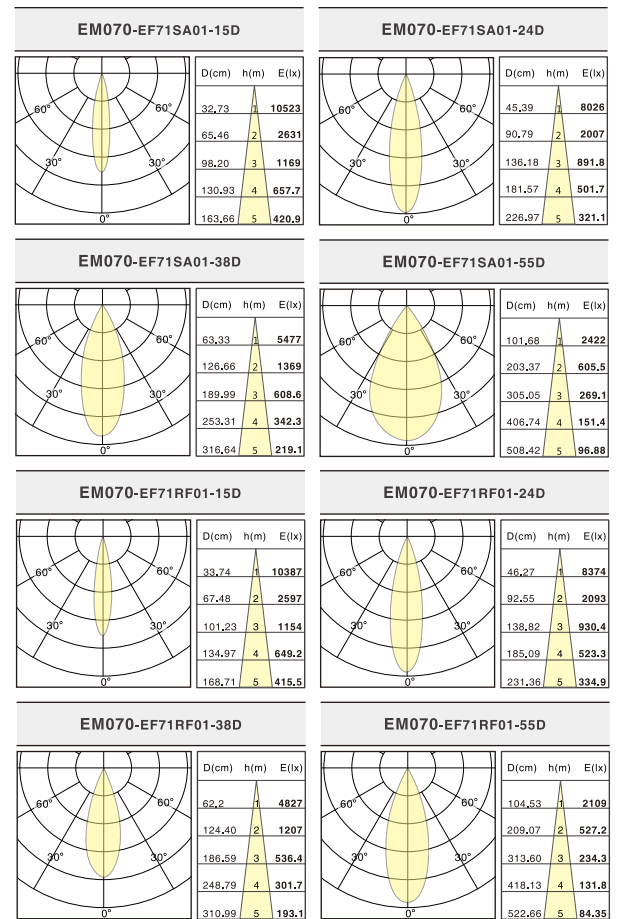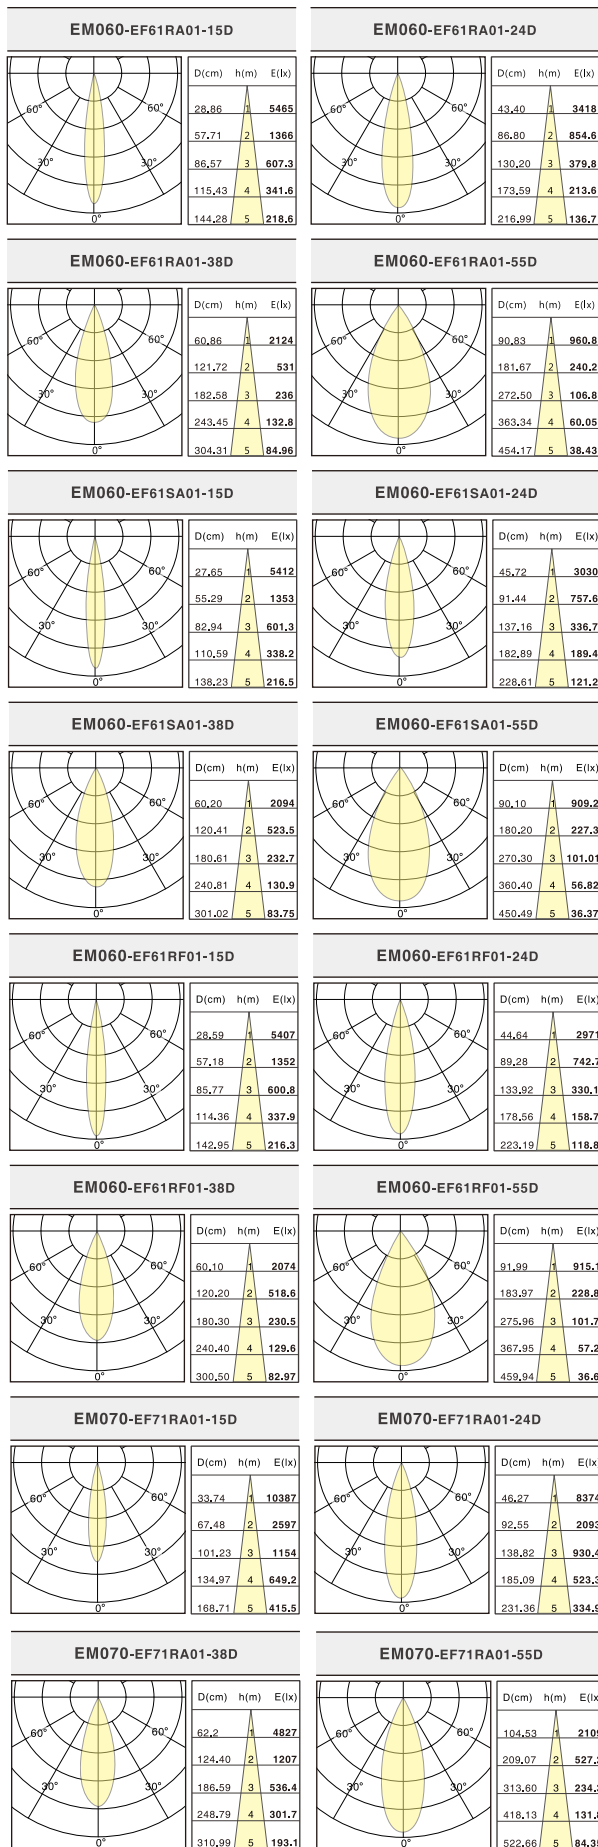

PACKAGE

Model	EM060-EF61RA01 EM060-EF61RF01 EM060-EF61RA01T EM060-EF61RF01T EM060-EF61SA01
PCS/Carton	27
Inner Box size(cm)	11.5*9.5*13
Carton size(cm)	40.5*36*30.5
Net weight(kg)	0.45
Gross weight(kg)	17

Model	EM060-EF61SA01
PCS/Carton	27
Inner Box size(cm)	11.5*9.5*13
Carton size(cm)	40.5*36*30.5
Net weight(kg)	0.46
Gross weight(kg)	17.1

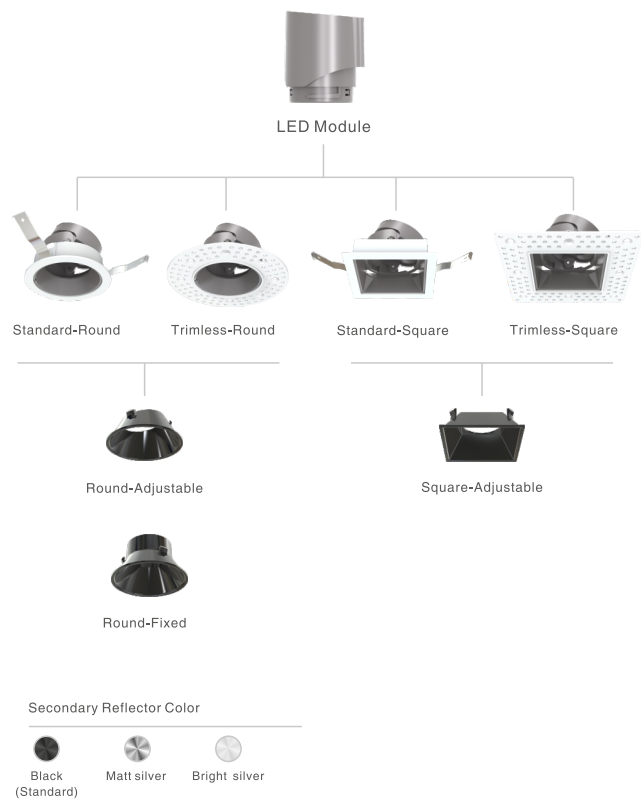

ANTI-GLARE ACCESSORY

