




MODULAR DESIGN




DIMENSION


EM060-EF62RA01




EM060-EF62RF01




EM060-EF62RA02




EM060-EF62RF02




EM060-EF62RA03




EM060-EF62RF03




EM060-EF62RA04




EM060-EF62SA04




EM060-EF62RA05




EM060-EF62SA05



EM070-EF71RA02



EM070-EF72RA01



DESCRIPTION

ELLA-Residential series, perfect spot lighting or accentuation with an almost invisible light aperture is ideally achieved. Super modular design with numerous mounting rings, round as well as square designs with adjustable and fixed options, in various wattages enable nuanced adaptations to different needs. Honeycomb filter can be added to provide maximum visual comfort.

FEATURES


- Elegant & compact in its style, versatile in its using.
- Precise light control, 15°, 24°, 38°, 55° beam lens options.
- Numerous mounting rings with round & square and adjustable & fixed options.
- Super modular design, replacing LED module, mounting ring, beam lens and anti-glare accessories without any needs for tools.
- IP20 is standard, IP44 is optional.

SPECIFICATION

INPUT VOLTAGE	220-240V / 100-120V / 100-277V AC, 50-60Hz
DIMMABLE	On-off, Phase dim, 1-10V, DALI
BEAM ANGLE	15°, 24°, 38°, 55°
HOUSING COLOR	Black
OPERATING TEMPERATURE RANGE	-20~+40°C

MODEL NUMBER	POWER	COLOR TEMP	LUMINOUS FLUX(Lm) CRI80+	LUMINOUS FLUX(Lm)±5% CRI90+	BEAM ANGLE
EM060-EF62RA01	9W	2700K 3000K	839 lm 915 lm	659 lm 718 lm	38°
EM060-EF62RA02	9W	2700K 3000K	822 lm 896 lm	645 lm 703 lm	38°
EM060-EF62RA03	9W	2700K 3000K	931 lm 1014 lm	731 lm 796 lm	38°
EM060-EF62RA04	9W	2700K 3000K	682 lm 741 lm	535 lm 582 lm	24°
EM060-EF62RA05	9W	2700K 3000K	687 lm 748 lm	539 lm 587 lm	24°
EM060-EF62RA01	13W	2700K 3000K	1304 lm 1428 lm	1024 lm 1115 lm	38°
EM060-EF62RA02	13W	2700K 3000K	1276 lm 1390 lm	1002 lm 1091 lm	38°
EM060-EF62RA03	13W	2700K 3000K	1446 lm 1576 lm	1135 lm 1237 lm	38°
EM060-EF62RA04	13W	2700K 3000K	1057 lm 1152 lm	830 lm 904 lm	24°
EM060-EF62RA05	13W	2700K 3000K	1066 lm 1162 lm	837 lm 912 lm	24°
EM070-EF72RF01	20W	2700K 3000K	2298 lm 2411 lm	1960 lm 2056 lm	55°
EM070-EF72RF01	25W	2700K 3000K	2636 lm 2766 lm	2248 lm 2359 lm	24°

LIGHT DISTRIBUTION

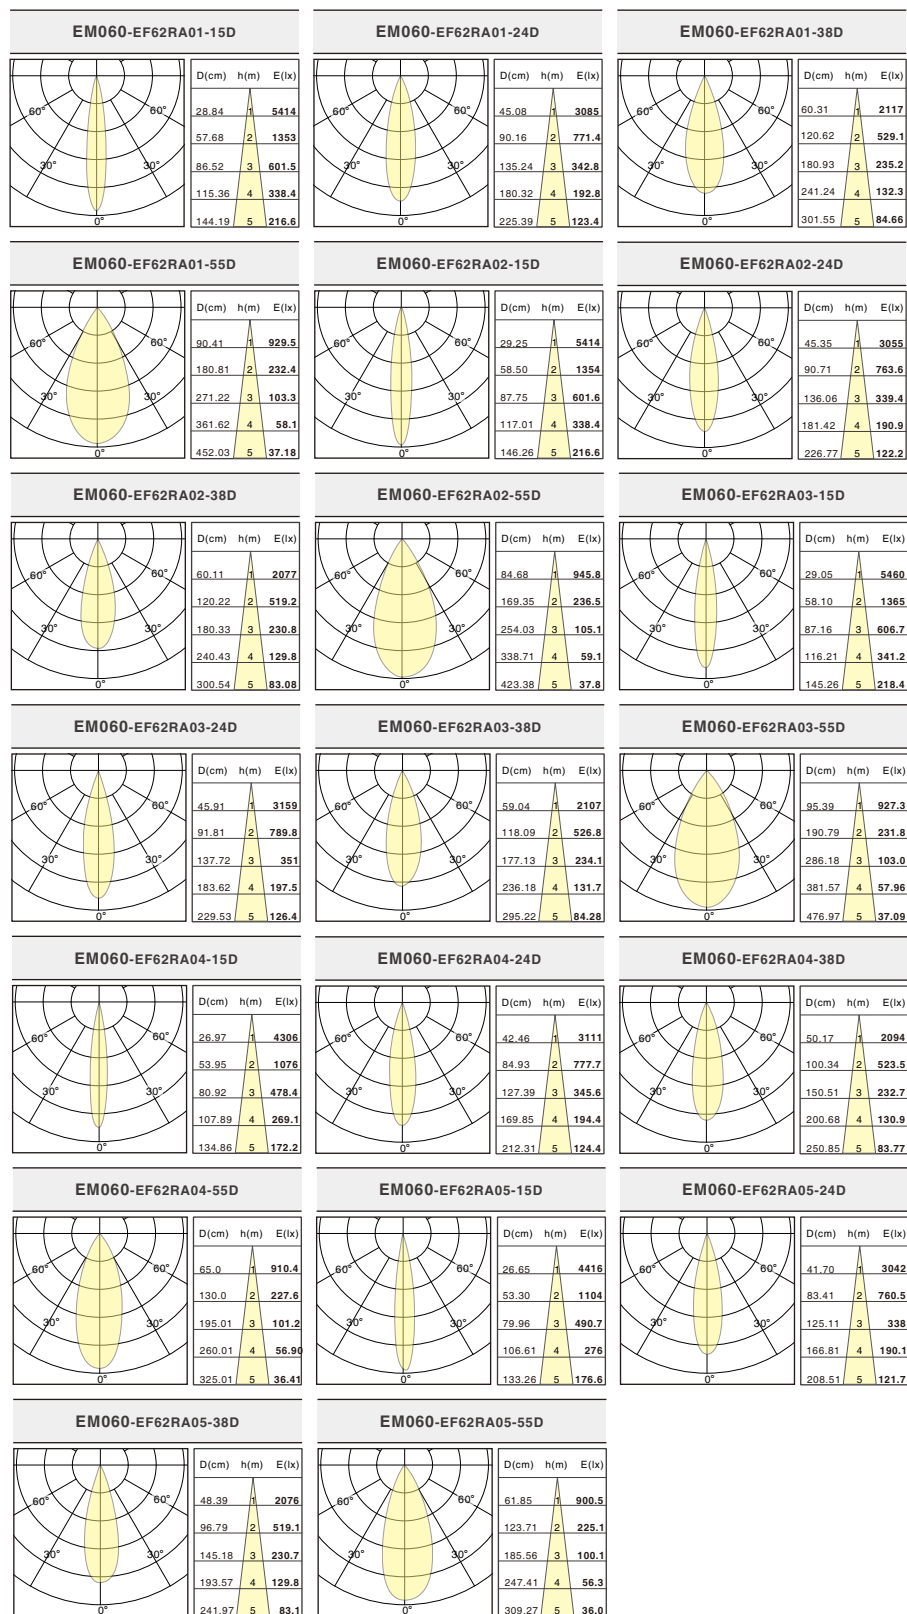

PACKAGE

Model	EM060-EF62RA01
	EM060-EF62RF01

PCS/Carton	27
Inner Box size(cm)	11.5*9.5*13
Carton size(cm)	40.5*36*30.5
Net weight(kg)	0.45
Gross weight(kg)	17

Model	EM060-EF62RA02
PCS/Carton	27
Inner Box size(cm)	11.5*9.5*13
Carton size(cm)	40.5*36*30.5
Net weight(kg)	0.48
Gross weight(kg)	17.7

Model	EM060-EF62RF02
PCS/Carton	27
Inner Box size(cm)	11.5*9.5*13
Carton size(cm)	40.5*36*30.5
Net weight(kg)	0.42
Gross weight(kg)	16

Model	EM060-EF62RA03
	EM060-EF62RF03
PCS/Carton	27
Inner Box size(cm)	11.5*9.5*13
Carton size(cm)	40.5*36*30.5
Net weight(kg)	0.40
Gross weight(kg)	15.8

Model	EM060-EF62RA04
	EM060-EF62SA04
PCS/Carton	27
Inner Box size(cm)	11.5*9.5*13
Carton size(cm)	40.5*36*30.5
Net weight(kg)	0.43
Gross weight(kg)	16.5


Model	EM060-EF62RA05
	EM060-EF62SA05
PCS/Carton	27
Inner Box size(cm)	11.5*9.5*13
Carton size(cm)	40.5*36*30.5
Net weight(kg)	0.43
Gross weight(kg)	16.5



LED Module


Adjustable

Fixed

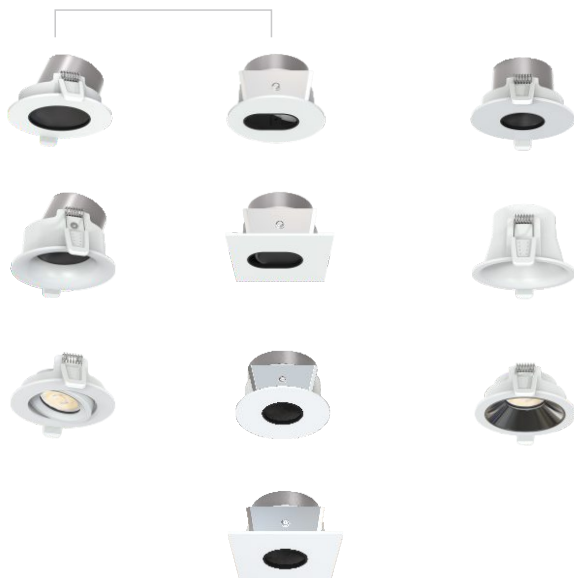

ANTI-GLARE

In the glare free angle, there is no direct view of the LED and the visible part of the reflector produces practically no glare at all. This zone offers very high visual comfort.

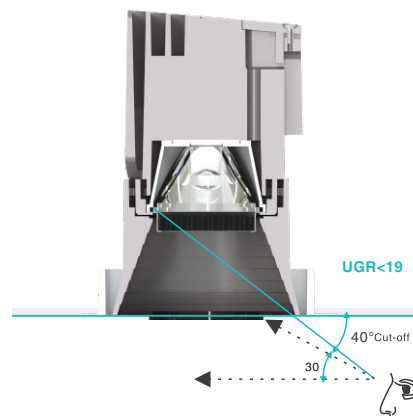

ANTI- GLARE ACCESSORY



Honeycomb



Soft Lens

