

## INSTALLATION INSTRUCTIONS

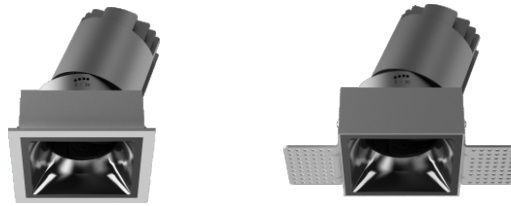
### Product name:

VILLA Square Down Light

### Model No. :

VSA082 VSA082S

TSA082 TSA082S



Please read these instructions carefully before commencing installation and retain for future reference. If any problem, please consult qualified electricians to get some help. These products must not be modified. If any modification is made it may invalidate the warranty and may render the product un-safe. All electrical installations must be carried out according to current IEE Wiring Regulations.






### IMPORTANT SAFETY NOTES

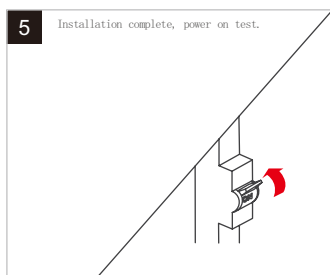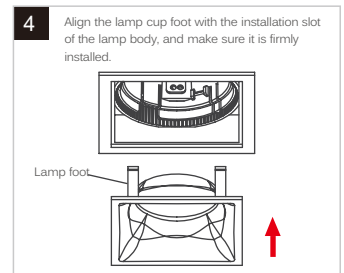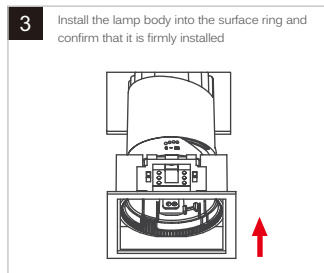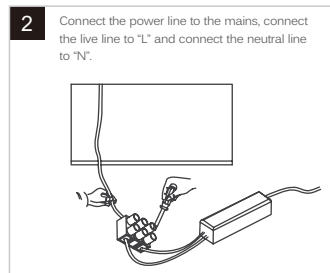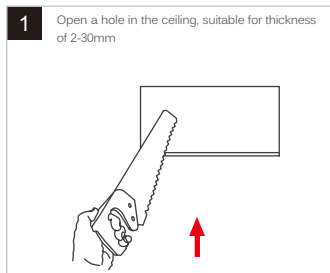1. Make sure all main power are disconnected before commencing installation or lamp change and (if a fuse box is used) remove the appropriate circuit fuse to avoid accidental switching on of the mains supply.
2. Connect to a 220V-240V supply in accordance with IEE regulations.
3. Make sure all connections are tight with no loose strands.
4. Ensure fire regulations are not breached when fitting your lights.
5. If you are in any doubt regarding these instructions, consult a qualified electrician.

### WARNING:












1. For indoor use only
2. Please ensure that the packaging is disposed of in a safe environment.
3. If cable is defected, do not use or exchange the cable.
4. We do recommend that a qualified electrician should be used to install the products.
5. Do not look at the lighted lamp directly.

### ① INSTALLATION METHOD ONE (Applicable to cut out size of 82X82mm)



## INSTALLATION INSTRUCTIONS
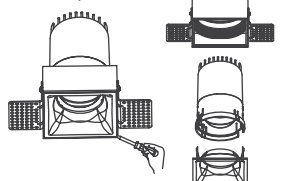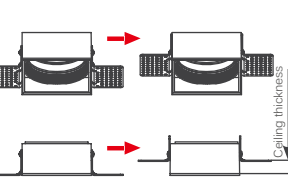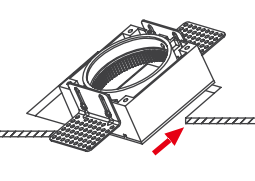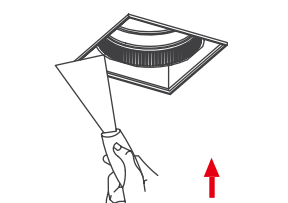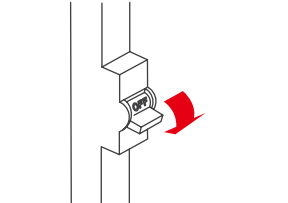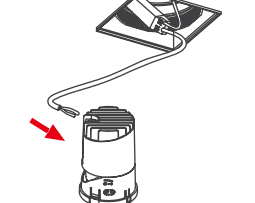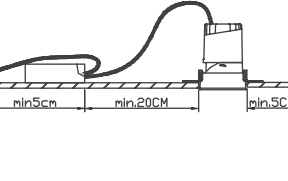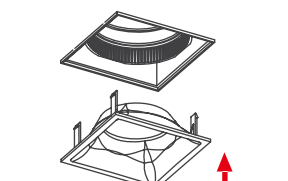
### ② INSTALLATION METHOD OF SQUARE TRIMLESS VERSION (Applicable to cut out size of 82X82mm)

<p><b>1</b> Open a hole in the ceiling, suitable for thickness of 2-30mm</p> 	<p><b>2</b> Lightly press the plastic clasps on the both side of the lamp body, and use a screwdriver to separate the mounting ring, lamp body and secondary reflector.</p> 	<p><b>3</b> Adjust the trimless trim on both sides of the mounting ring to the ceiling thickness, so that the mounting ring is flush with the ceiling surface after installation.</p> 	<p><b>4</b> Put the surface ring into the ceiling through the opened hole.</p> 
<p><b>5</b> Using glue to stick the trimless trim on the ceiling, or fix it on the ceiling with screws.</p> 	<p><b>6</b> Using paint to cover the exposed mark and edge joints.</p> 	<p><b>7</b> Disconnect the main power supply.</p> 	<p><b>8</b> Connect the drive and lamp power supply firmly.</p> 
<p><b>9</b> Install the lamp body into the ceiling through the surface ring, make sure the plastic clasp be clipped into the surface ring and confirm that the installation is firm.</p> 	<p><b>10</b> Installation of drivers and lamps shall be in accordance with the standards shown in the drawing.</p> 	<p><b>11</b> Align the locating post of reflector with the locating slot and put it into the lamp body, confirm the installation is firm.</p> 	<p><b>12</b> Installation complete, power on test.</p> 