



DESCRIPTION

OVEGA(EN-TLO series, standard version) is a stylish and compact LED track light that will fit smoothly into any retail, gallery environments. The front snoot can bring a good light comfort. The head can be adjusted precisely 360°+ horizontal(rotation) and 90°vertical without dead angle. The light, as a result, is emitted exactly where you need it. The integrated driver gives clean feeling and the ceiling will not be cluttered with drivers aimed in different directions.

FEATURES

- Stylish and compact design with integrated driver.
- Excellent modular combination concept: integrated driver+ different fixture bases, DIY to get different light solutions and easy for maintenance.
- Light efficiency is up to 95lm/W.
- Interchangeable lens: 15°, 24°, 38°, 60°.
- Privately-designed joints can hold the lights at any positions without malfunctions.
- 360°+ rotation without dead angle and 90°vertical aiming.
- Use OVEGA family to get a unified impression in one environment.



DETAILS



Eye comfortable design

Very reliable joint


Cat outline

SPECIFICATION

INPUT VOLTAGE	220-240V / 100-120V / 100-277V AC, 50-60Hz
DIMMABLE	Phase 0/1-10V DALI
BEAM ANGLE	15°, 24°, 38°, 60°
HOUSING COLOR	White, black, silver
OPERATING TEMPERATURE RANGE	-20~+45°C

DIMENSION

EN-TLO020-11
EN-TLO025-11
EN-TLO030-11




OPTICAL ACCESSORIES

NO


MODEL NUMBER	POWER	COLOR TEMP	LUMINOUS FLUX(Lm)	BEAM ANGLE
EN-TLO020-11	20W	3000K	2053lm(CRI80+)	15°
		4000K	2208lm(CRI80+)	
		3000K	2152lm(CRI80+)	24°
		4000K	2314lm(CRI80+)	
		3000K	2134lm(CRI80+)	38°
		4000K	2295lm(CRI80+)	
		3000K	2009lm(CRI80+)	60°
		4000K	2160lm(CRI80+)	
EN-TLO025-11	25W	3000K	2143lm(CRI80+)	15°
		4000K	2304lm(CRI80+)	
		3000K	2250lm(CRI80+)	24°
		4000K	2419lm(CRI80+)	
		3000K	2240lm(CRI80+)	38°
		4000K	2408lm(CRI80+)	
		3000K	2162lm(CRI80+)	60°
		4000K	2325lm(CRI80+)	
EN-TLO030-11	30W	3000K	2696lm(CRI80+)	15°
		4000K	2899lm(CRI80+)	
		3000K	2841lm(CRI80+)	24°
		4000K	3055lm(CRI80+)	
		3000K	2873lm(CRI80+)	38°
		4000K	3089lm(CRI80+)	
		3000K	2741lm(CRI80+)	60°
		4000K	2948lm(CRI80+)	

LIGHT DISTRIBUTION

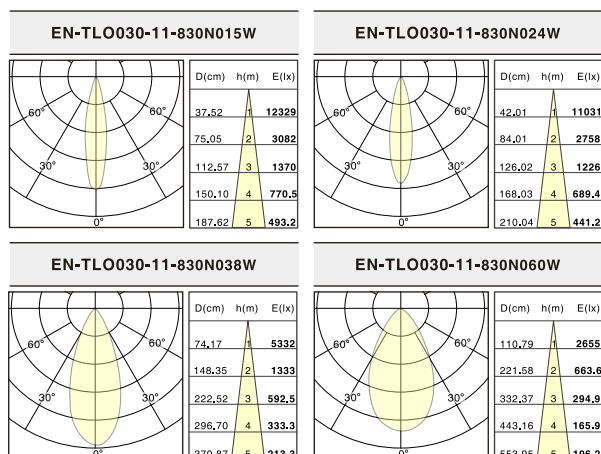


INSTALLATION


On Track




3-circuit 4 pin



Standard




Global



3 pin



Halo



2 pin



Juno



Lightolier

Surface-mounted

EN-TLO020-12
EN-TLO025-12
EN-TLO030-12



Suspending

EN-TLO020-13
EN-TLO025-13
EN-TLO030-13



Wall-mounted

EN-TLO020-14
EN-TLO025-14
EN-TLO030-14



PACKAGE

Model	EN-TLO020-11 EN-TLO025-11 EN-TLO030-11
PCS/ Carton	15
Inner Box size(cm)	11.5*11.0*26.2
Carton size(cm)	56.5*36*28.5
Net weight(kg)	13.2
Gross weight(kg)	15.6

OVEGA FAMILY

UNLIMITED POSSIBILITIES with OVEGA family. Seven versions in excellent modular combination concept with similar appearances but different light solutions entitle OVEGA family will fit smoothly into any retails, museums and galleries environment.

In versions with different light solutions, OVEGA covers high performance accent lighting with very narrow beam 6°, different interchangeable beam lens & different optical accessories, flood lighting of exhibits, beam angle adjusting from narrow to wide, wall washing and projection.

Except versatile light solutions, OVEGA is also a complete family with different installation methods(track-mounted, pendant, surface-mounted and wall-mounted). So, if you have an environment where ask for different light solutions & different installation methods, OVEGA family will be a great choice to get a unified impression.

