


DETAILS




Perfect Thermal Management

High efficiency heat convection design in the compact design ensures long lifespan. Perfect thermal management integrates small body with big wattage makes the ceiling looks clear and comfortable.



Concealed 1-10V Control Gear

Built-in 0/1-10V flicker free individual dimmer, small and delicate to ensure the perfect appearance whilst offers smooth brightness adjustment experience.



Super Reliable Joint

Durable and reliable double-spindle design, support free and smooth adjustment without any noise, aiming at where you want, which have been using for 8 years and 0 malfunction.

MEGA Light Solution:



Spotlights

Very narrow to very wide beam, rotationally symmetrical light distribution for accent lighting.

MEGA

10W-25W  
Light distribution: Narrow spot, Spot, Flood



Floodlights

Axially symmetrical light distribution with flood characteristics produced by an oval beam for floodlighting.

MEGA

10W-15W  
Light distribution: Wide flood, line flood, extra wide flood



Lens wallwashers


Asymmetrical light distribution for highly uniform wallwashing with clear and straight cut-off line over the top.

MEGA

10W-15W  
Light distribution: Wallwasher

Magic 10°

"10° lens + 5 different Filter" get 5 different light shapes.

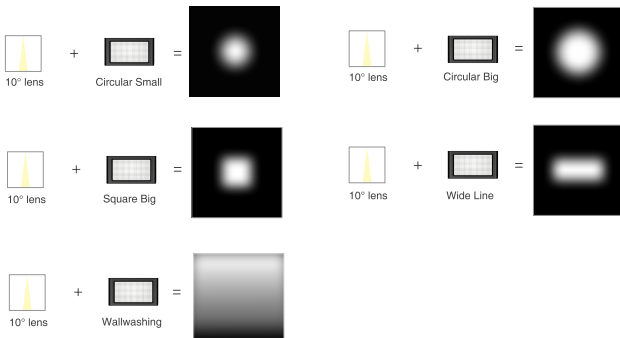

DESCRIPTION

Mega, a tailor-made LED track light for museums and galleries. The minimalist industrial design appearance can fit smoothly into the display areas. Using advanced high lumen output and CRI95+ high saturation light color LED chips to restore the real color of the exhibits with soft and natural light. The superflexible snap-on interchangeable filters design offers 9 types of beam shapes from 10° to 60°, flood and wall washing lighting. With built-in flicker-free driver, support standard dimming triac, 0/1-10V individual dimmer and intelligent dimming DALI, Casambi etc to satisfy the requirement of flexible adjusting the lighting brightness.

FEATURES


- Mega series LED track light, equipped with super flexible snap-on interchangeable filters design offers 10 types of beam shapes from 10° to 60°, flood and wall washing lighting. Different beam shapes provide accurate light distribution along with high saturation lighting color.
- 3 models from 10W-30W offers 5 different wattages satisfy the 3m-10m lighting needs and more extensive application spaces.
- Using the advanced high lumen output and CRI90+ high saturation light color LED chips to restore the real color of the exhibits with soft and natural light.
- Built-in flicker-free driver, support standard dimming triac, 0/1-10V individual dimmer and intelligent dimming DALI, Casambi etc to satisfy the requirement of flexible adjusting the lighting brightness.

SPECIFICATION

INPUT VOLTAGE	220-240V / 100-120V / 100-277V AC, 50-60Hz
DIMMABLE	On/off, Triac, DALI, CASAMBI, Built-in dimmer
BEAM ANGLE	10°, 25°, 40°, 60°
HOUSING COLOR	White, black
OPERATING TEMPERATURE RANGE	-20~+45°C

MODEL NUMBER	POWER	COLOR TEMP	LUMINOUS FLUX(Lm)±5%	LUMINOUS FLUX(Lm)
EN-TLY010	10W	3000K	1038lm(CRI80+)	880lm(CRI90+)
		4000K	1162lm(CRI80+)	985lm(CRI90+)
EN-TLY015	15W	3000K	1661lm(CRI80+)	1408lm(CRI90+)
		4000K	1859lm(CRI80+)	1576lm(CRI90+)
EN-TLY025	25W	3000K	2492lm(CRI80+)	2112lm(CRI90+)
		4000K	2790lm(CRI80+)	2365lm(CRI90+)


DIMENSION

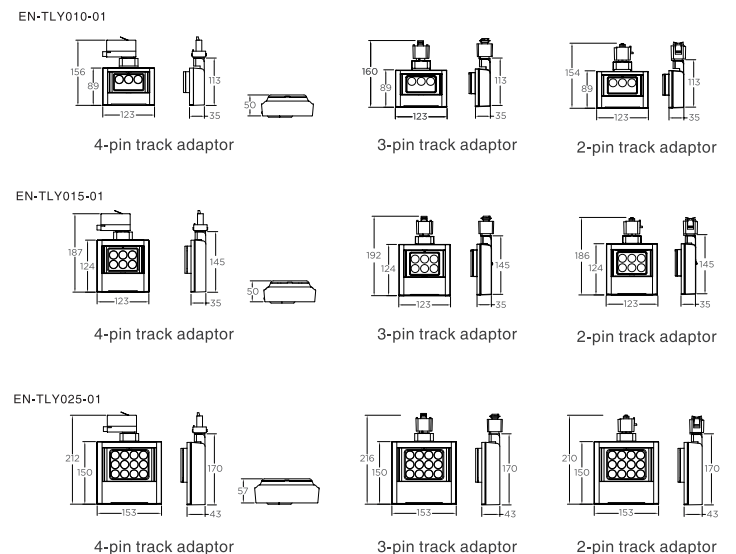

LIGHT DISTRIBUTION


EN-TLY-010

3000K

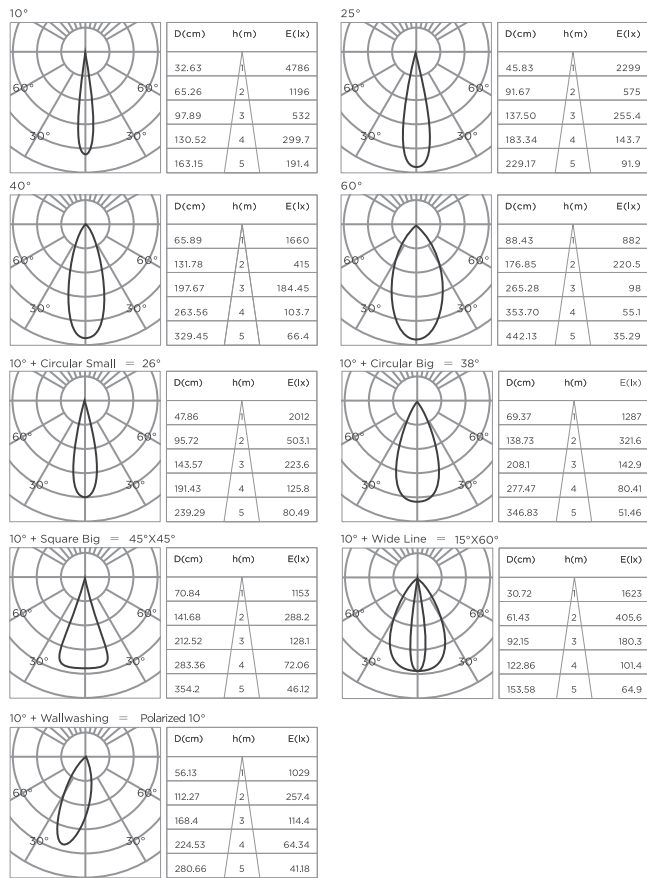


EN-TLY-015

3000K

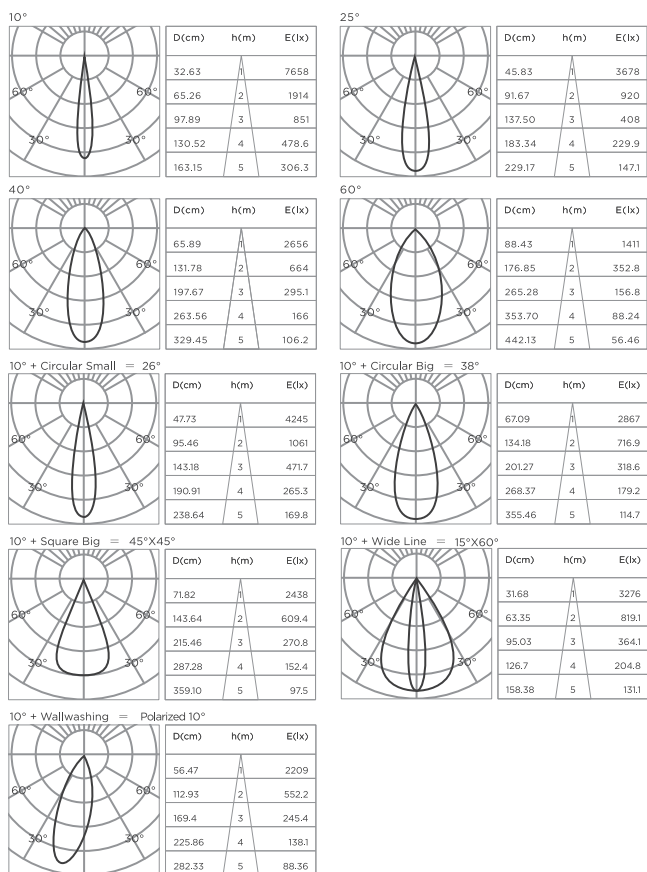


EN-TLY-025

3000K

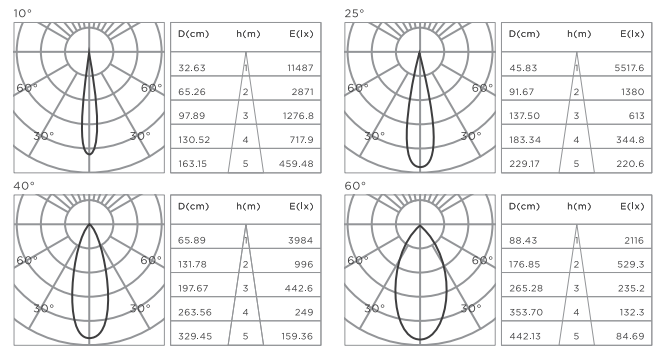

INSTALLATION

On Track

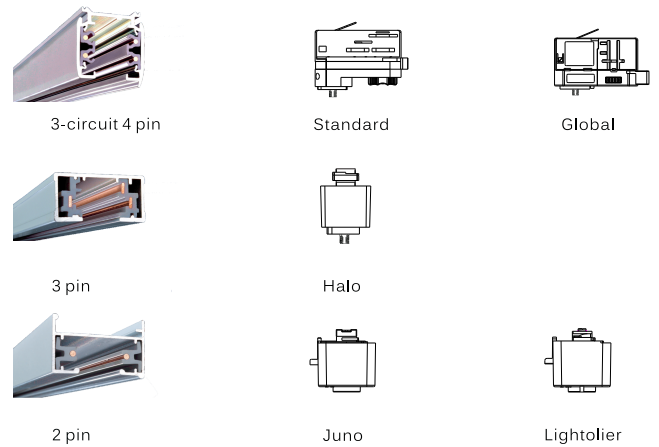

PACKAGE

Model	EN-TLY010-01
PCS/ Carton	14
Inner Box size(cm)	16*8*21
Carton size(cm)	57.5*32.5*21
Net weight(kg)	7.2
Gross weight(kg)	9.5

Model	EN-TLY015-01
PCS/ Carton	14
Inner Box size(cm)	16*8*22.5
Carton size(cm)	57.5*32.5*24.5
Net weight(kg)	9.3
Gross weight(kg)	11.8