



DESCRIPTION

IMAX(EN-TLI series, zoomable version) is a slim and clean LED track light that will fit smoothly into any museum, exhibition and gallery environments. Featuring an adjustable beam mechanism designed to provide endless beam options from a 15° narrow to a 90° wide with sharp outline or from a 15° narrow to a 70° wide with soft outline . Every IMAX-T contains a built-in dimmer, to smoothly control the light from 100% to 5%, creating the right individual scenery. The head can be adjusted precisely 360°+ horizontal(rotation) without dead angle and 90°vertical. The light, as a result, is emitted exactly where you need it.

FEATURES



- Slim and clean design with integrated driver(15W, 20W, 30W).
- By adjusting the focal length, the beam angle is changed from 15° to 90° with sharp outline or from 15° to 70° with soft outline .
- Privately-designed joints can hold the track head at any positions without malfunctions.
- Self-dimming is available thanks to built-in dimmer(1-10V dimming).
- 360°+ rotation without dead angle and 90°vertical aiming.

SPECIFICATION

INPUT VOLTAGE 220-240V / 100-120V / 100-277V AC, 50-60Hz  
**DIMMABLE** Phase, 1-10V, DALI  
 BEAM ANGLE 15° -90°; 15° -70°  
 INSTALLATION On 4-pin, 3-pin or 2-pin track, surface-mounted  
 HOUSING COLOR White, black, silver  
 OPERATING TEMPERATURE RANGE -20~+45°C

MODEL NUMBER	POWER	COLOR TEMP	LUMINOUS FLUX(Lm)±5%	LUMINOUS FLUX(Lm)
EN-TLI015-01	15W	2700K	1210lm(CRI80+)	973lm(CRI90+)
		3000K	1301lm(CRI80+)	1047lm(CRI90+)
		4000K	1370lm(CRI80+)	1102lm(CRI90+)
		5000K	1427lm(CRI80+)	1148lm(CRI90+)
EN-TLI020-01	20W	2700K	1659lm(CRI80+)	1305lm(CRI90+)
		3000K	1784lm(CRI80+)	1403lm(CRI90+)
		4000K	1878lm(CRI80+)	1477lm(CRI90+)
		5000K	1957lm(CRI80+)	1538lm(CRI90+)
EN-TLI030-01	30W	2700K	2101lm(CRI80+)	1681lm(CRI90+)
		3000K	2259lm(CRI80+)	1801lm(CRI90+)
		4000K	2378lm(CRI80+)	1896lm(CRI90+)
		5000K	2477lm(CRI80+)	1975lm(CRI90+)

LIGHT DISTRIBUTION

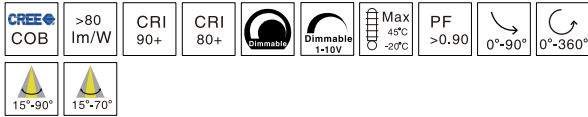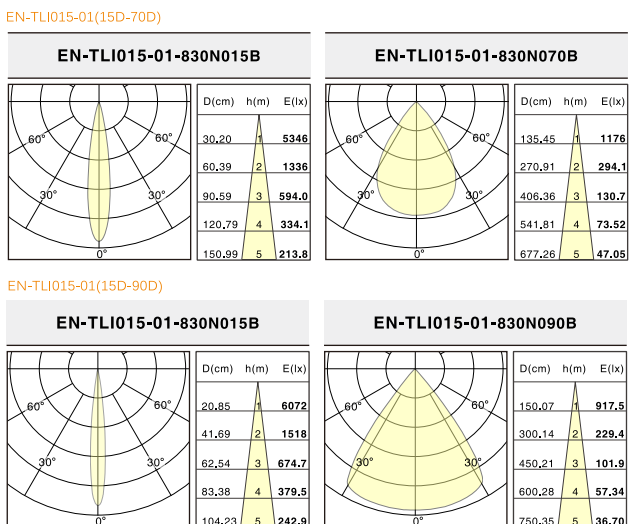


DETAILS




built-in Dimmer with honeycomb and barn door push in & pull out to change the light beam

DIMENSION


EN-TLI015-01

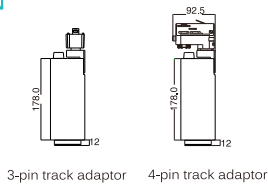

EN-TLI020-01

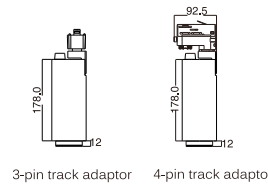

EN-TLI030-01

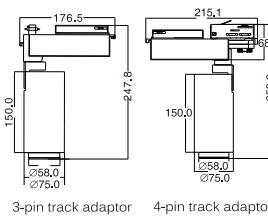


OPTICAL ACCESSORIES

Accessories




**LIGHT DISTRIBUTION**


EN-TLI020-01(15D-70D)

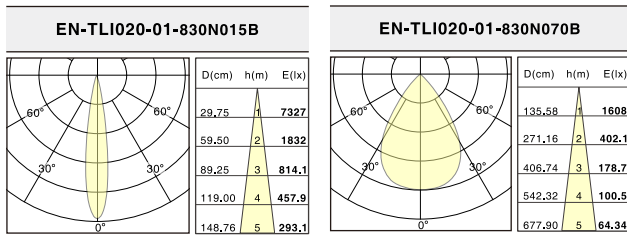


EN-TLI020-01(15D-90D)

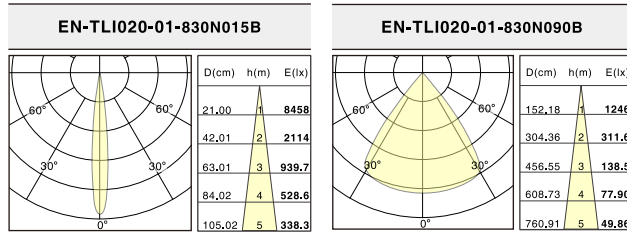

EN-TLI030-01(15D-70D)

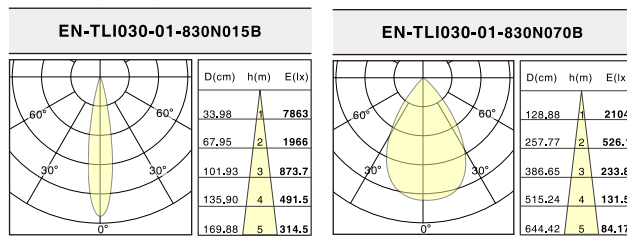


EN-TLI030-01(15D-90D)

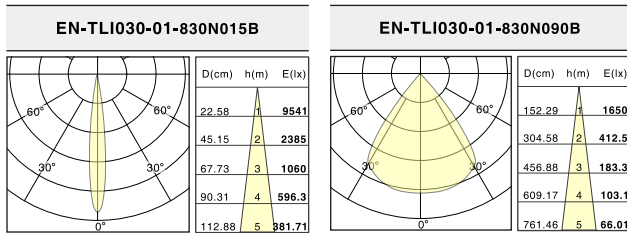


**INSTALLATION**


On Track




3-circuit 4 pin



Standard



Global



3 pin



Halo


**PACKAGE**

Model	EN-TLI015-01 EN-TLI020-01
PCS/Carton	15
Inner Box size(cm)	11.5*11*29.2
Carton size(cm)	56.5*36*31.5
Net weight(kg)	1
Gross weight(kg)	18


Model	EN-TLI030-01
PCS/Carton	10
Inner Box size(cm)	24.0*22.7*11.5
Carton size(cm)	59.5*47.0*26.0
Net weight(kg)	1.1
Gross weight(kg)	14

**Lighting Solutions**

Beam angle adjustable from 15° to 90° with sharp outlines

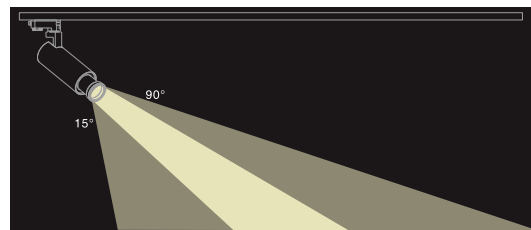

Beam angle adjustable from 15° to 70° with soft outline

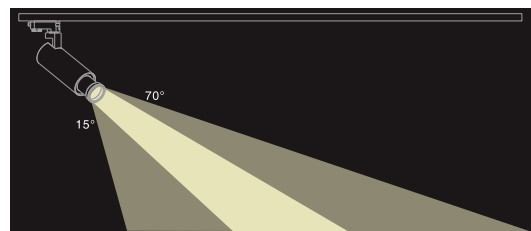

**IMAX FAMILY**

ONE SOLUTION for many beam angle challenges. IMAX family Track Lights provide first-class options for architects, lighting designer who want superior flexibility in an LED accent lighting system.

In versions with different light solutions, IMAX covers high performance accent lighting with different interchangeable beam lens, beam angle adjusting from narrow to wide, and contour projection.

Attracted by it's slim and clean design, IMAX is a complete family with full lighting solutions. If you have an environment ask for different lighting solution, I-MAX will be the best choice to get a unified impression.

