




DESCRIPTION

FLEX(EN-TLF series, zoomable version) is a slim cylinder in foldable design LED track light that will fit smoothly into any museum, exhibition and gallery environments. Featured adjustable beam design to provide various options for 25° narrow to 60° wide angle. The head can be adjusted precisely 360°+ horizontally(rotation) and 90°vertically without dead angle. The light, as a result, is emitted exactly where you need it. Support track mount and surface mount.

FEATURES

- A sleek & elegant cylinder in foldable design, concise but not simple.
- By simply rotating the front ring, the beam angle can be adjusted from 25° to 60°.
- Private-designed joints can hold the track head at any positions without malfunctions.
- Smart magnet can make fixture base and driver box seamless connect.
- 360°+ rotation without dead angle and 90° vertical aiming.



DETAILS



High Lumen efficiency >85lm/W

2 in 1 Foldable Design


The Magnets inside make 2 parts sealed perfectly.

SPECIFICATION

INPUT VOLTAGE	220-240V / 100-120V / 100-277V AC, 50-60Hz
DIMMABLE	NO
BEAM ANGLE	20° -70°(8W), 25° -60°(20W/25W)
INSTALLATION	On 4-pin, 3-pin track or 2-pin track, surface-mounted
HOUSING COLOR	White, black, silver
OPERATING TEMPERATURE RANGE	-20~+45°C

DIMENSION

EN-TLF020-11
EN-TLF025-11

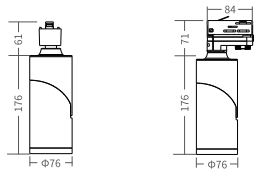

3-pin track adaptor


4-pin track adaptor

MODEL NUMBER	POWER	COLOR TEMP	LUMINOUS FLUX(Lm)±5%	LUMINOUS FLUX(Lm)
EN-TLF020-11	20W	2700K	1560lm(CRI80+)	1404lm(CRI90+)
		3000K	1660lm(CRI80+)	1494lm(CRI90+)
		4000K	1740lm(CRI80+)	1566lm(CRI90+)
		5000K	1800lm(CRI80+)	1620lm(CRI90+)
EN-TLF025-11	25W	2700K	1975lm(CRI80+)	1777lm(CRI90+)
		3000K	2120lm(CRI80+)	1908lm(CRI90+)
		4000K	2200lm(CRI80+)	1980lm(CRI90+)
		5000K	2275lm(CRI80+)	2047lm(CRI90+)

OPTICAL ACCESSORIES

NO

LIGHT DISTRIBUTION

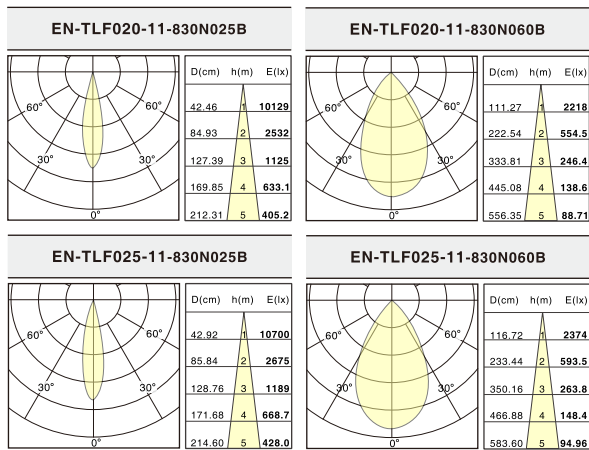


PACKAGE

Model	EN-TLF020-11 EN-TLF025-11
PCS/Carton	12
Inner Box size(cm)	26.2*12.6*9.2
Carton size(cm)	53.4*26.2*28.6
Net weight(kg)	12.5
Gross weight(kg)	14.4


Lighting Solutions

Beam angle adjustable from 25° to 60° (25W)

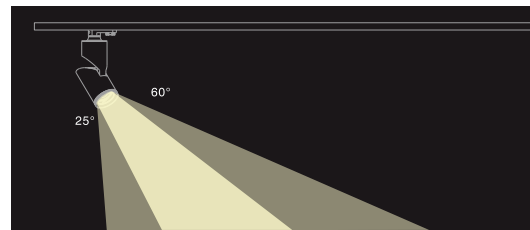


INSTALLATION

On Track

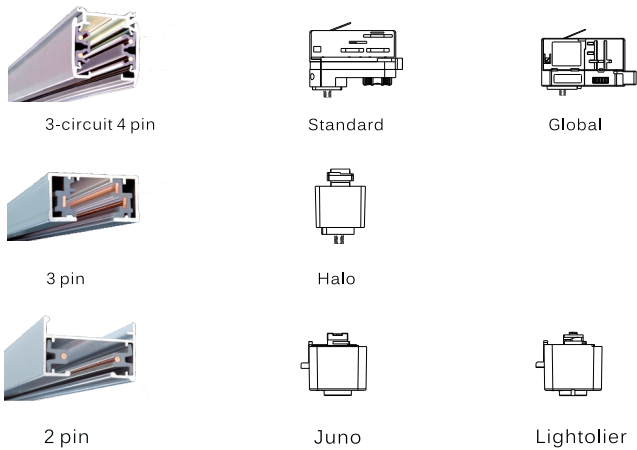

Surface-mounted

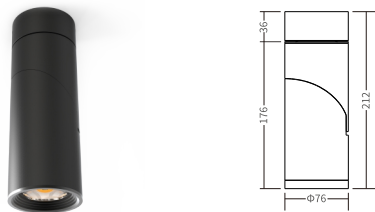

EN-TLF020/025-12