



DETAILS




High Lumen Efficiency :  
**110lm/W** ( CRI80+ )




Deep anti-glare structure  
maximum the eyes comfort level.  
**UGR<16**  
Plus honeycomb filter,  
the UGR is even <10.

DIMENSION

EN-TLE010-11  
EN-TLE015-11

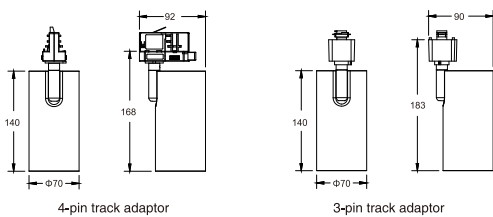

EN-TLE020-11  
EN-TLE025-11  
EN-TLE030-11

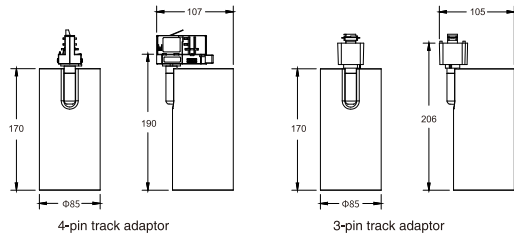

DESCRIPTION

ALINE is a stylish and compact LED track light that will fit smoothly into any retail, gallery environments. High lumen efficiency(>110lm/W) & versatile optical accessories can increase the great light comfort and fulfill different light demands. The head can be adjusted precisely 360°+ horizontal(rotation) and 90° vertical without dead angle. The light, as a result, is emitted exactly where you need it. The integrated driver gives clean feeling and the ceiling will not be cluttered with drivers aimed in different directions.

FEATURES



- Stylish and compact design with integrated driver.
- Light efficiency is up to **110lm/W**(static white) & **100lm/W**(CCT selectable)
- Interchangeable lens: 15°, 24°, 36°, 60°.
- Help client reduce inventory pressure, make CCT selectable(27K/30K/40K) as an option.
- Maximum the visual comfortable, the UGR is <16, plus honeycomb filter, the UGR is even <6.
- Very clean & elegant design, decorate the environment in a minimalist style.
- Privately-designed joints can hold the track head at any positions without malfunctions.
- 360°+ rotation without dead angle and 90°vertical aiming.

SPECIFICATION

INPUT VOLTAGE	220-240V / 100-120V / 100-277V AC, 50-60Hz
DIMMABLE	On-off, Triac, DALI
BEAM ANGLE	15°, 24°, 36°, 60°
HOUSING COLOR	White, black, silver
OPERATING TEMPERATURE RANGE	-20--+45°C

MODEL NUMBER	POWER	COLOR TEMP	LUMINOUS FLUX(Lm)	BEAM ANGEL
EN-TLE010-11	10W	3000K	890lm(CRI90+)	36°
EN-TLE015-11	15W	3000K	1220lm(CRI90+)	36°
EN-TLE020-11	20W	3000K	1830lm(CRI90+)	36°
EN-TLE025-11	25W	3000K	2160lm(CRI90+)	36°
EN-TLE030-11	30W	3000K	2430lm(CRI90+)	36°

LIGHT DISTRIBUTION

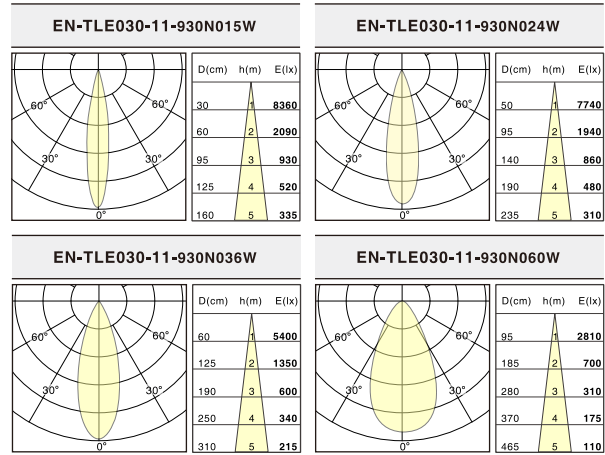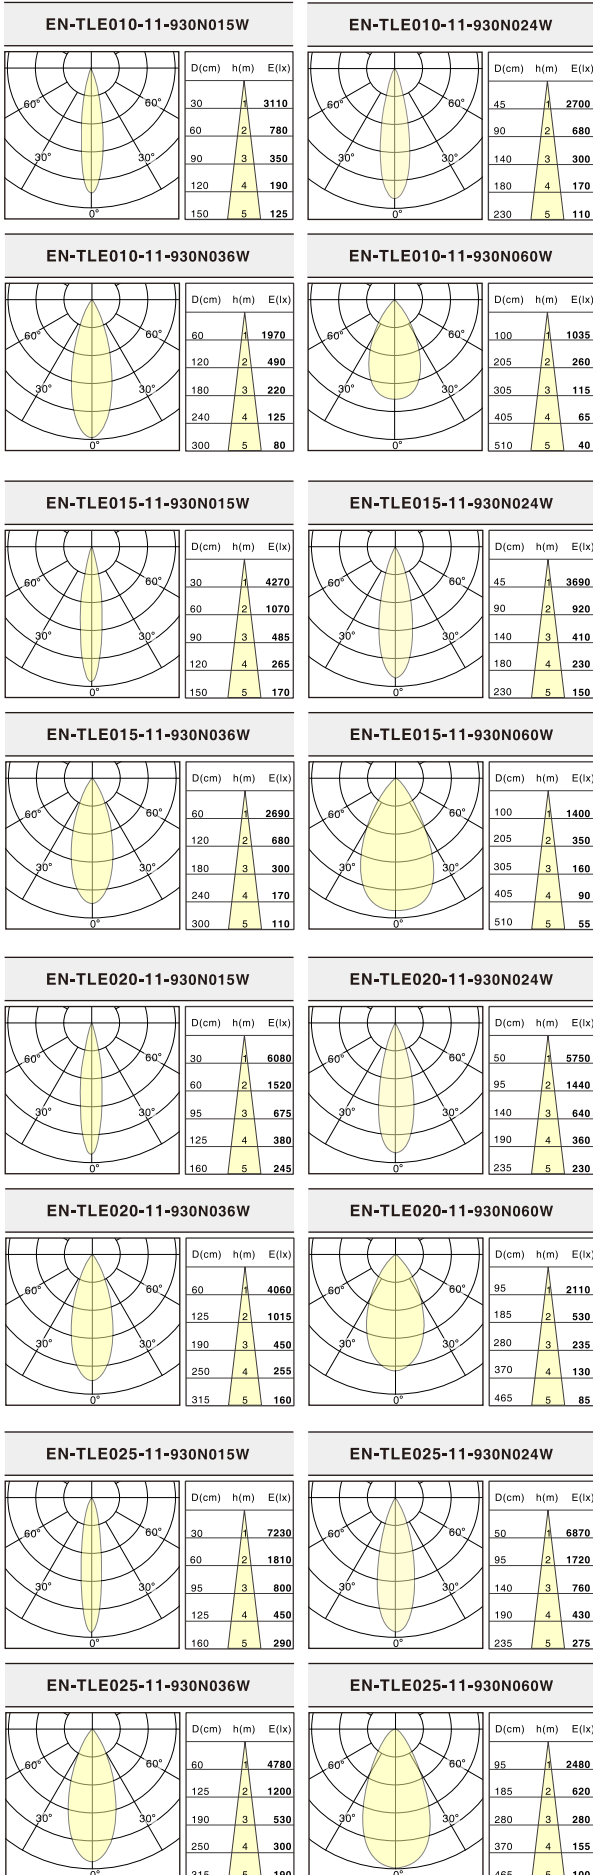

PACKAGE

Model	EN-TLE010-11 EN-TLE015-11
PCS/ Carton	15
Inner Box size(cm)	12.0*9.5*23.5
Carton size(cm)	49.0*37.5*25.5
Net weight(kg)	9.0
Gross weight(kg)	12.0
Model	EN-TLE020-11 EN-TLE025-11 EN-TLE030-11
PCS/ Carton	12
Inner Box size(cm)	13.5*11.0*26.0
Carton size(cm)	45.5*42.0*28.0
Net weight(kg)	12.0
Gross weight(kg)	15.0

INSTALLATION

On Track

