



VEGA-Standard

TVS08S-11



DESCRIPTION

The VEGA Standard track light is available in three compact sizes—1.5", 2", and 3"—and combines powerful lighting with an elegant, slim design. Featuring in-track drivers for diverse dimming options and a modular design for interchangeable optical accessories, it's perfectly suited for both retail and commercial spaces.

FEATURES

- Slim and sleek aesthetic design without screw.
- 360+° rotatable, 90° tiltable.
- High power in compact size (Ultra mini size 1.5"/40mm dia).
- Tunable white 2700-6500K optional.
- In-track driver for flexible dimming: triac, dali, wireless control.
- Wide range of Interchangeable accessories: honey-comb, soft, oval filter etc.
- Flexible mounting options: Track-mounted, Surface-mounted.

ELECTRICAL

Power:	8W
Voltage:	230V AC
Frequency:	50/60Hz
Power factor:	>0.90
Dimming:	On-off / 1-10V / DALI / TRIAC / CASAMBI



OPTICAL

LED type:	COB
Lumen output:	594lm
Beam optic:	15° / 24° / 38° / 50°
Color quality:	CRI 90+, SDCM≤2
Light color:	Static white: 2700K/3000K/3500K/4000K Tunable white: 2700K-6500K

LUMINAIRE

Installation methods:	Track-mounted / Surface-mounted
Housing color:	Black / White / Silver
Operating temperature:	-20°C~40°C
Lifespan:	>50000h@80%(L80)
Warranty:	5 years limited warranty

DETAILS

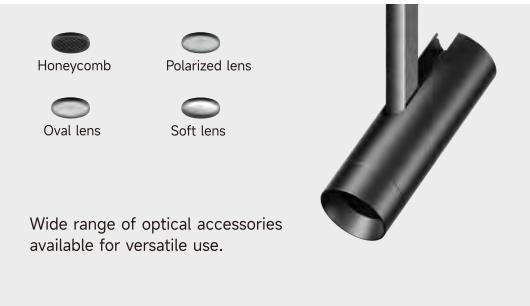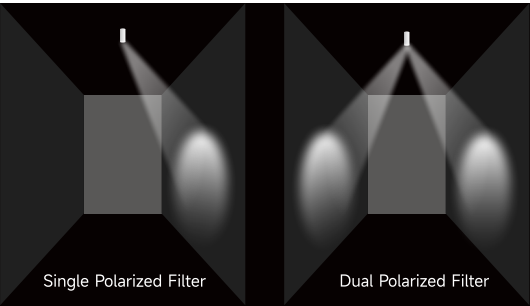



ORDERING INFORMATION

TVS								
SERIES	POWER	INSTALLATION	HOUSING COLOR	TRACK TYPE	CRI	CCT	OPTIC	DIMMING
☐ TVS VEGA Φ40mm	☐ 08S 8W Standard Version	☐ 11 Track ☐ 12 Surface	☐ W White ☐ B Black ☐ S Silver	☐ 02 2-pin ☐ 03 3-pin ☐ 41 4-pin ☐ 63 6-pin	☐ 8 80+ ☐ 9 90+	☐ 27 2700K ☐ 30 3000K ☐ 35 3500K ☐ 40 4000K ☐ TW Tunable White 2700K-6500K	☐ 015 15° ☐ 024 24° ☐ 038 38° ☐ 050 50°	☐ V 1-10V ☐ T Triac ☐ X 0-10V/Triac ☐ D DALI ☐ C CASAMBI ☐ N Non-dimming

ACCESSORIES (TO BE ORDERED SEPARATELY)
FOR INSTALLATION CONSULT THE INSTRUCTION SHEET

OPTICAL ACCESSORY

☐ **Honeycomb**
TVS08S-H

☐ **Oval Lens**
TVS08S-OV

☐ **Polarized Lens**
TVS08S-PL

☐ **Soft Lens**
TVS08S-SL






PHOTOMETRIC DATA (NON-DIMMING)

POWER	CCT	CRI	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/W)	MAX CANDELA (cd)
8W	3000K	90	15°	579	64	5650
			24°	594	65	3185
			38°	589	65	1451
			50°	579	64	947

LIGHT DISTRIBUTION

3000K 8W

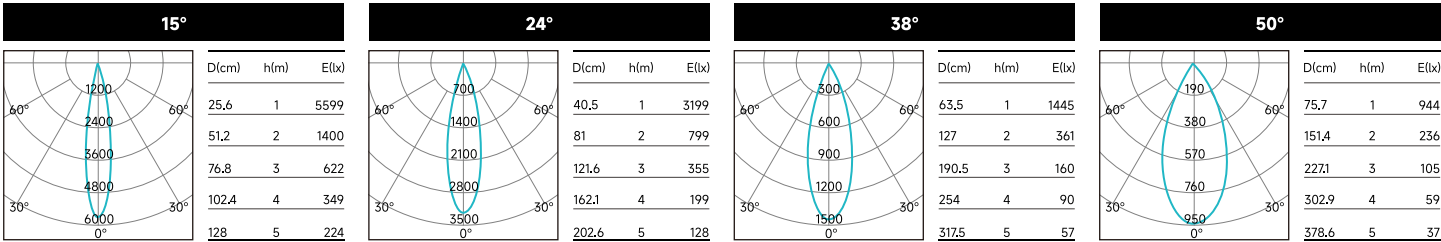


LUMEN MULTIPLIERS

CCT	MULTIPLIER
2700K	0.91
3000K	1.00
3500K	1.01
4000K	1.02

Applying Lumen Multipliers to Calculate Delivered Lumens


Base Fixture Delivered Lumens (from PHOTOMETRIC DATA)	x	CCT Multiplier	=	Delivered Lumens for Desired Fixture
STANDARD TRIM Example: TVS08S 8W 3500K				
579 lm	x	1.01	=	584 lm

DIMENSION

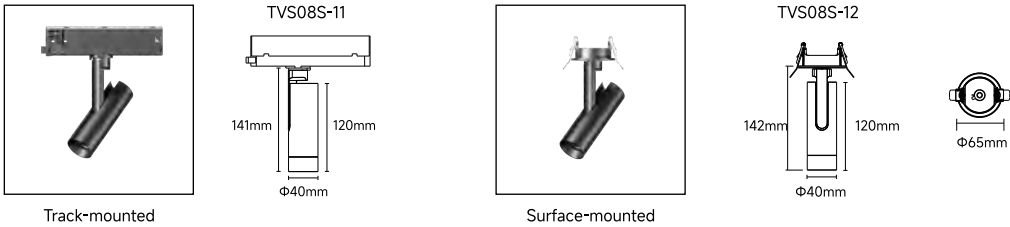

INSTALLATION

Track-mounted

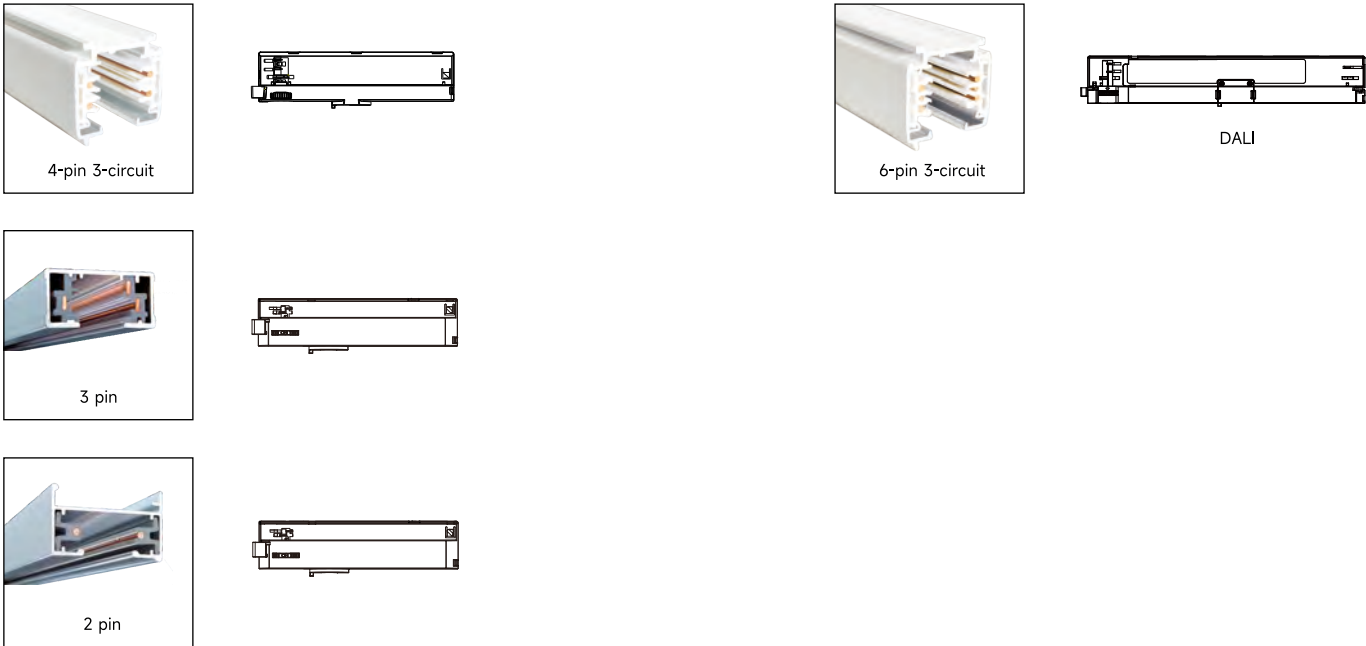

Surface-mounted





VEGA TRACK LIGHT SYSTEM

The VEGA track light series is a versatile lighting collection that includes standard, premium, zoomable, and framing options, designed to function as a complete lighting system.

With its slim and sleek appearance, this series not only enhances the aesthetics of any space but also provides museum-quality illumination with precise control. Its modular design supports a broad array of optical accessories and mounting options, positioning Vega as the optimal solution for retail environments, commercial spaces, museums, and galleries.

DETAILS



Scan to know more about product information