


LINEAR LIGHT

SL60D

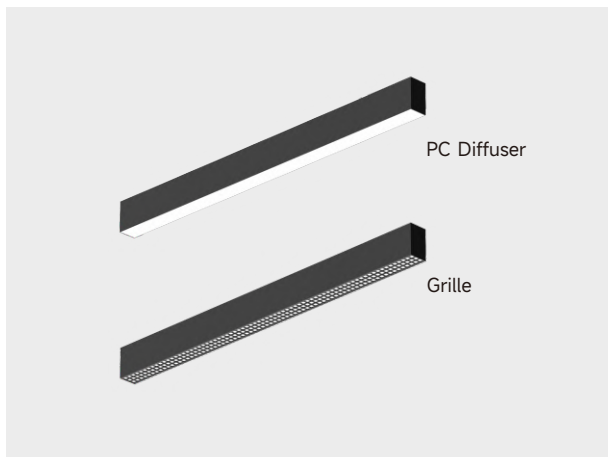

DESCRIPTION

The 2.4-inch linear LED ceiling light offers efficient, glare-reducing lighting, available in 2 to 6-foot lengths with continuous run, the and hospitality interiors. durable aluminum housing compliments a sleek aesthetic, perfect for upscale residential, commercial.

FEATURES

- Narrow width 61mm.
- Diffused optical cover / Grille cover available.
- High light efficacy DLC Standard $\geq 120\text{lm/W}$.
- Up and down lighting.
- Easy to connect multiple fixtures for scalable continuous run.
- Quick and easy installation with adjustable suspension wire spacing.

SPECIFICATIONS

ELECTRICAL

Power:	20W, 40W, 60W
Voltage:	AC 220-240V
Frequency:	50/60Hz
Power Factor:	>0.90
Dimming:	On-off / 0/1-10V / DALI / CASAMBI

OPTICAL

LED Type:	SMD
Lumen Output:	2400lm-7200lm(PC Diffuser), 2500lm-7500lm(Grille)
Beam Optic:	PC Diffuser(100°) / Grille(60°)
Light Type:	Downlight / UP&Downlight
Color Quality:	CRI 80+/90+, SDCM ≤ 5
Color Temperature:	Static White: 3000K, 4000K, 5000K
Color Management:	CWG

LUMINAIRE

Housing Color:	White / Black / Custom Finish*(Consult Factory)
Operating Temperature:	-20°C~40°C
Lifespan:	>50000h@80%(L80)
Warranty:	5 years Carefree for Parts and Components (Labor not included) LED luminaire life reduction and warranty invalidation will occur if installed in environments above 40°C

PHYSICAL




Length Options:	598mm(20W) / 1192mm(40W) / 1786mm(60W)
Construction:	Aluminum
Mounting:	Pendant, Surface-mounted, Wall-mounted, Recessed



Type:

Project:

DETAILS

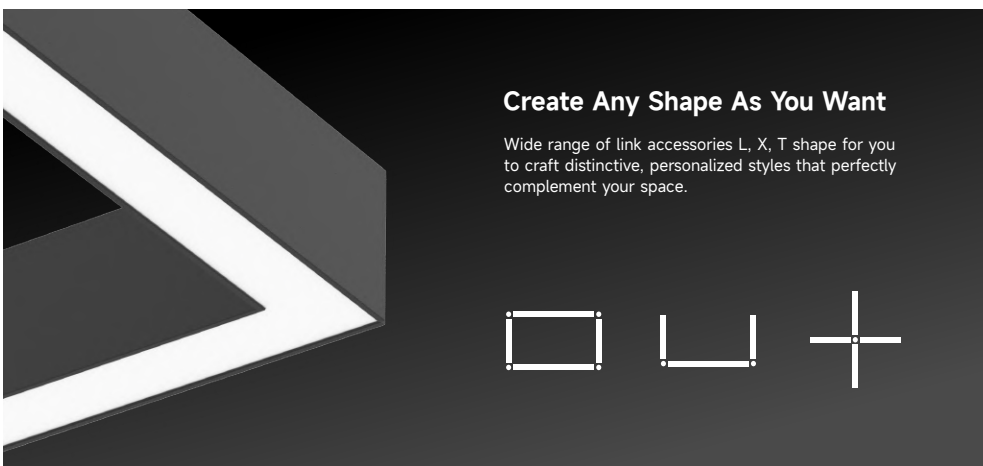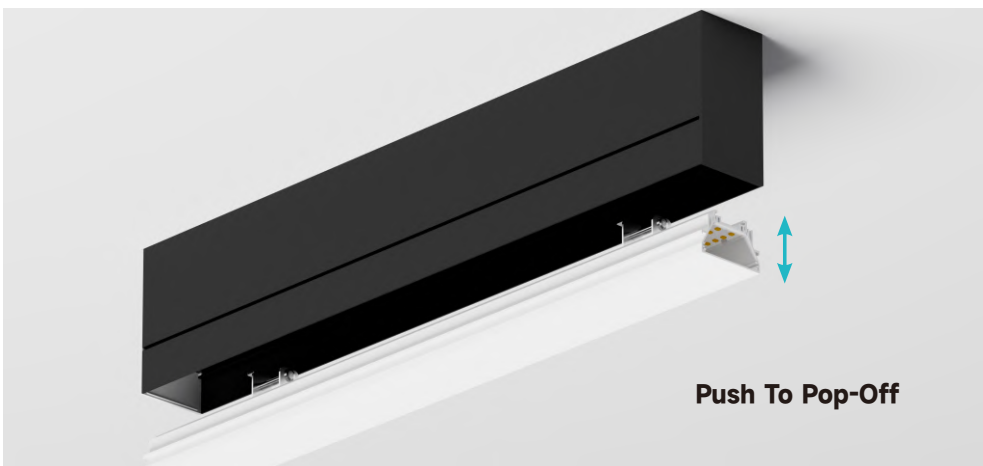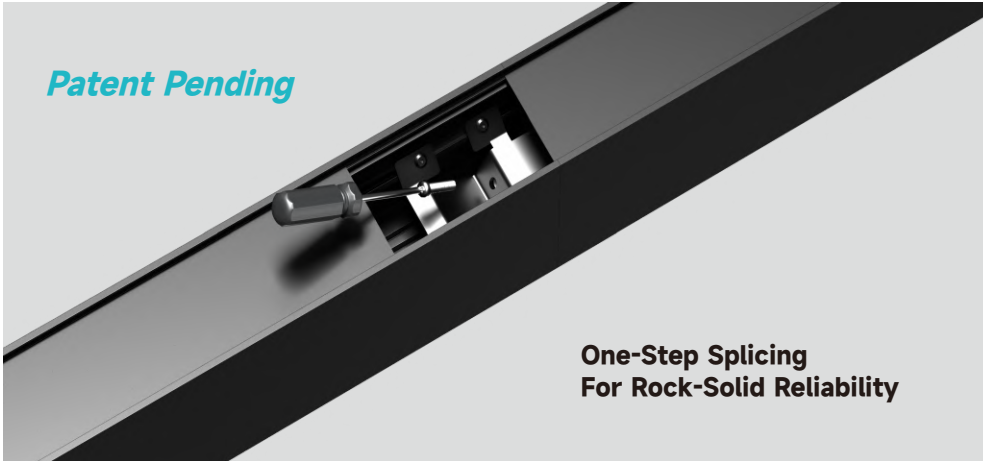



Type:

Project:

ORDERING INFORMATION

SL60	D					
SERIES	LIGHTING TYPE	LENGTH	POWER	VERSION	INSTALLATION	HOUSING COLOR
<input type="checkbox"/> SL60 SLEM 61mm Width	<input type="checkbox"/> D Direct only <input type="checkbox"/> B Bidirectional	<input type="checkbox"/> 2FT 598mm <input type="checkbox"/> 4FT 1192mm <input type="checkbox"/> 6FT 1786mm	<input type="checkbox"/> 20 20W <input type="checkbox"/> 40 40W <input type="checkbox"/> 60 60W	<input type="checkbox"/> S Standard	<input type="checkbox"/> SP Pendant <input type="checkbox"/> SM Surface Mount <input type="checkbox"/> WM Wall Mount <input type="checkbox"/> RM Recessed Mount	<input type="checkbox"/> W White <input type="checkbox"/> B Black <input type="checkbox"/> C Custom Finish *(Consult Factory)

CRI	CCT	BEAM OPTIC	VOLTAGE	DIMMING	MULTIPLE CONNECTION
<input type="checkbox"/> 8 80+ <input type="checkbox"/> 9 90+	<input type="checkbox"/> 30 3000K <input type="checkbox"/> 40 4000K <input type="checkbox"/> 50 5000K <input type="checkbox"/> CWG Color Management	PC Diffuser <input type="checkbox"/> 100 Flood100° Grill Cover <input type="checkbox"/> 60 Spot60°	<input type="checkbox"/> EV 220-240V	<input type="checkbox"/> V 0/1-10V <input type="checkbox"/> D DALI <input type="checkbox"/> C CASAMBI <input type="checkbox"/> N Non-dimming	<input type="checkbox"/> N No <input type="checkbox"/> S YES



Type:

Project:

PHOTOMETRIC DATA (NON-DIMMING)

LUMEN PACKAGE	POWER	CCT	100°		
			LUMENS	EFFICACY	MAX CANDELA
SLEM 2.4	40W	3000K	4525	119	1736


Above test data is based on [PC Diffuser](#) with 3000K 80CRI LED.

LUMEN PACKAGE	POWER	CCT	60°		
			LUMENS	EFFICACY	MAX CANDELA
SLEM 2.4	40W	3000K	4890	128	5158

Above test data is based on [Grill Cover](#) with 3000K 80CRI LED.


LIGHT DISTRIBUTION

3000K 40W

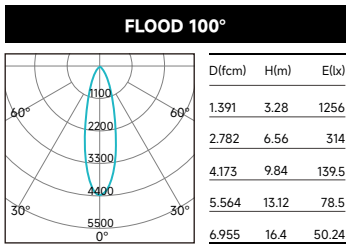

Above test data is based on [PC Diffuser](#) with 3000K 80CRI LED.

3000K 40W

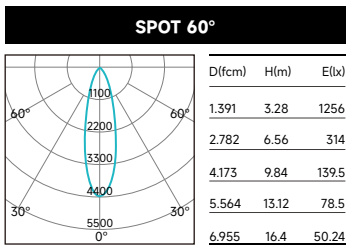

Above test data is based on [Grill Cover](#) with 3000K 80CRI LED.




Type:

Project:

DIMENSION

L=Length	W=Width	H=Height
598mm	61mm	100mm
1192mm		
1786mm		

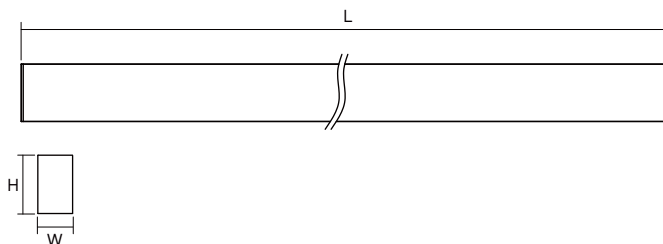


INSTALLATION


Surface Mounted





Pendant




Wall Mounted



Recessed



Trimless Recessed






Type:

SPECIFICATION SHEET

Project:

Page 6 / 6

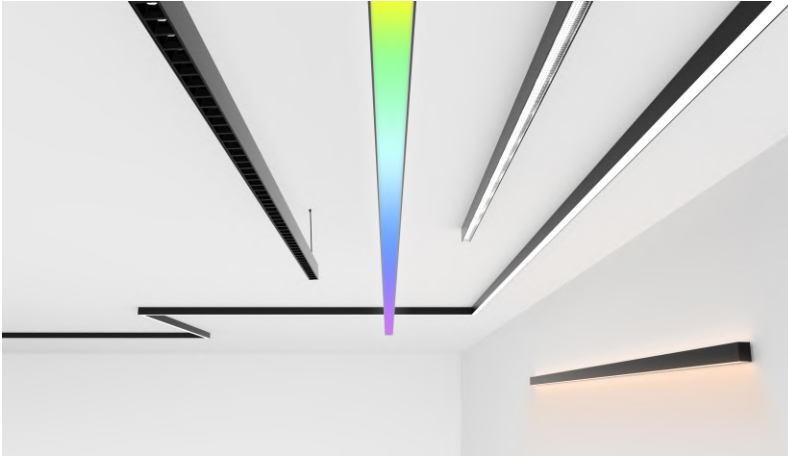

LINERA LIGHT SYSTEM

The linear lighting systems feature a strong profile for a nearly hair thin connection in continuous runs. Available in lengths of 2', 3', 4', 6', and 8', as well as custom options. High efficiency (115-130 lm/w) is delivered, with CCT switchable from 3000K to 4000K to suit different indoor settings. Various designs can be formed using L, X, and T joints, with full mounting options pendant, wall, surface, as well as wide range of accessories to provide maximum flexibility.

DETAILS



Scan to know more about product information