


LINEAR LIGHT

AT26D

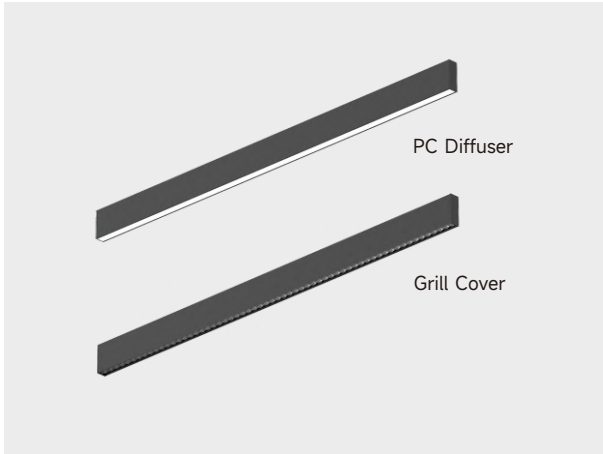

DESCRIPTION

This Atro 26mm linear series features ultra-low-glare lighting solutions designed for maximum visual comfort. The durable aluminum housing compliments a sleek aesthetic, perfect for upscale residential, commercial and hospitality interiors.

FEATURES

- Ultra narrow 26mm width.
- Diffused optical cover / Grille cover available.
- High light efficacy 125lm/w(Grill Cover).
- UGR≤3.2(Grill Cover) For visual comfort.
- Easy to connect multiple fixtures for scalable continuous run.
- Quick and easy installation with adjustable suspension wire spacing.

SPECIFICATIONS

ELECTRICAL

Power:	25W, 30W, 50W
Voltage:	AC 220-240V
Frequency:	50/60Hz
Power Factor:	>0.90
Dimming:	On-off / 0/1-10V / DALI

OPTICAL

LED Type:	SMD
Lumen Output:	1800lm-3600lm(PC Diffuser), 3300lm-4950lm(Grill Cover)
Beam Optic:	PC Diffuser(100°) / Grill Cover(20°, 40°, 60°, 20°x20°)
Light Type:	Downlight
Color Quality:	CRI 80+/90+, SDCM≤5
Color Temperature:	Static White: 2700K, 3000K, 3500K, 4000K, 5000K

LUMINAIRE

Housing Color:	White / Black / Custom Finish*(Consult Factory)
Operating Temperature:	-20°C~40°C
Lifespan:	>50000h@80%(L80)
Warranty:	5 years Carefree for Parts and Components (Labor not included) LED luminaire life reduction and warranty invalidation will occur if installed in environments above 40°C
Listing:	ETL & cETL listed for dry locations

PHYSICAL

Length Options:	960mm(25W) / 1200mm(30W) / 1800mm(50W)
Construction:	Aluminum
Mounting:	Pendant





Type:

SPECIFICATION SHEET

Project:

Page 2 / 5

DETAILS

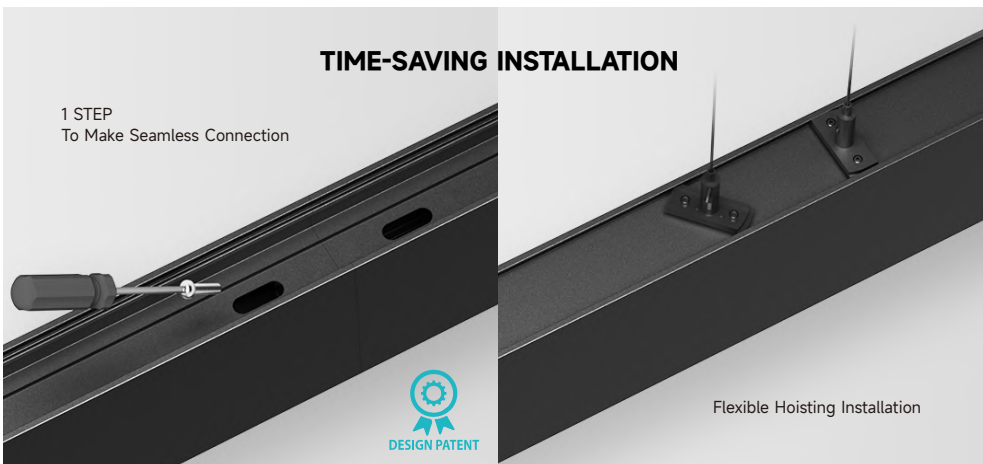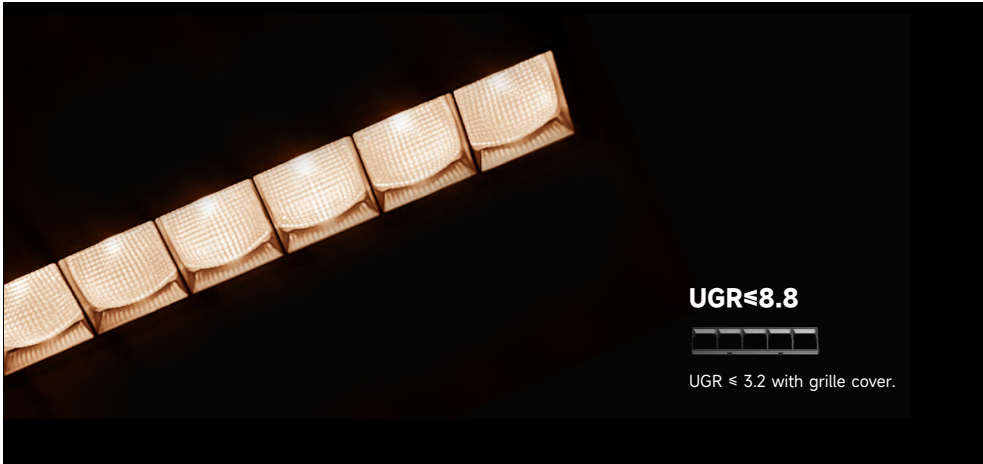



Type:

Project:

ORDERING INFORMATION

AT26	D					
SERIES	LIGHTING TYPE	LENGTH	POWER	VERSION	INSTALLATION	HOUSING COLOR
<input type="checkbox"/> AT26 ATRO 26mm Width	<input type="checkbox"/> D Direct only	<input type="checkbox"/> 3FT 960mm <input type="checkbox"/> 4FT 1200mm <input type="checkbox"/> 6FT 1800mm	<input type="checkbox"/> 25 25W <input type="checkbox"/> 30 35W <input type="checkbox"/> 50 50W	<input type="checkbox"/> S Standard	<input type="checkbox"/> SP Pendant	<input type="checkbox"/> W White <input type="checkbox"/> B Black <input type="checkbox"/> C Custom Finish *(Consult Factory)

CRI	CCT	BEAM OPTIC	VOLTAGE	DIMMING	MULTIPLE CONNECTION
<input type="checkbox"/> 8 80+ <input type="checkbox"/> 9 90+	<input type="checkbox"/> 27 2700K <input type="checkbox"/> 30 3000K <input type="checkbox"/> 35 3500K <input type="checkbox"/> 40 4000K <input type="checkbox"/> 50 5000K	PC Diffuser <input type="checkbox"/> 100 Wide flood 100°±10° Grill Cover <input type="checkbox"/> 20 Spot 20°±2° <input type="checkbox"/> 40 Spot 40°±4° <input type="checkbox"/> 60 Flood 60°±6° <input type="checkbox"/> 2X2 Rectangular 20°x20°	<input type="checkbox"/> EV 220-240V	<input type="checkbox"/> V 0/1-10V <input type="checkbox"/> D DALI <input type="checkbox"/> N Non-dimming	<input type="checkbox"/> N No <input type="checkbox"/> S YES



Type:

Project:

PHOTOMETRIC DATA (NON-DIMMING)

LUMEN PACKAGE	POWER	CCT	100°		
			LUMENS	EFFICACY	MAX CANDELA
ATRO 1	30W	3000K	2065	75	772


Above test data is based on [PC Diffuser](#) with 3000K 80CRI LED.

LUMEN PACKAGE	POWER	CCT	20°			40°			60°			20°*20°		
			LUMENS	EFFICACY	MAX CANDELA	LUMENS	EFFICACY	MAX CANDELA	LUMENS	EFFICACY	MAX CANDELA	LUMENS	EFFICACY	MAX CANDELA
ATRO 1	30W	3000K	3720	128	22011	3699	127	8554	3552	122	4387	3692	127	22828

Above test data is based on [Grill Cover](#) with 3000K 80CRI LED.


LIGHT DISTRIBUTION

3000K 30W

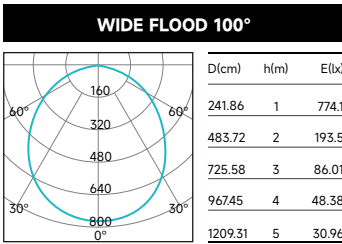

Above test data is based on [PC Diffuser](#) with 3000K 80CRI LED.


3000K 30W

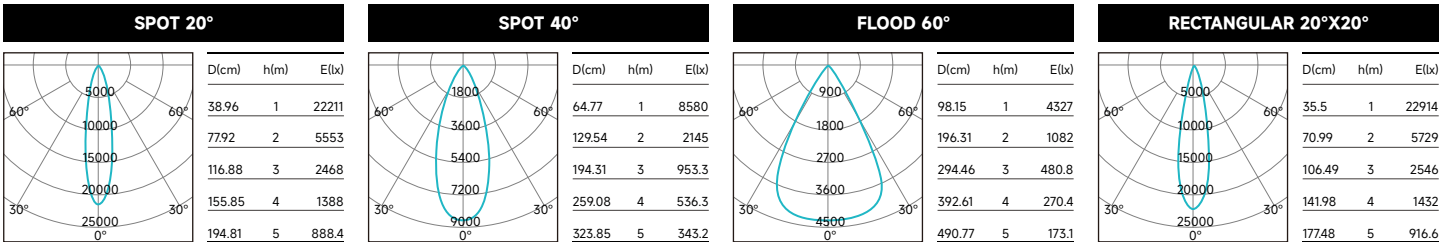

Above test data is based on [Grill Cover](#) with 3000K 80CRI LED.


DIMENSION

L=Length	W=Width	H=Height
960mm	26mm	77mm
1200mm		
1800mm		

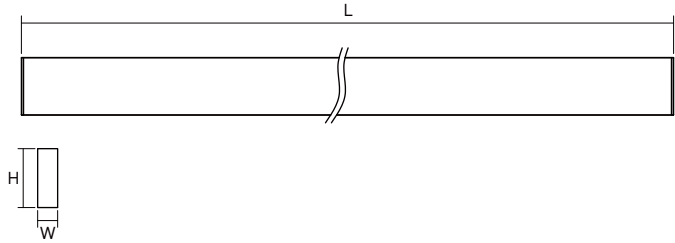

INSTALLATION


Pendant



Pendant Junction Box



Pendant Set

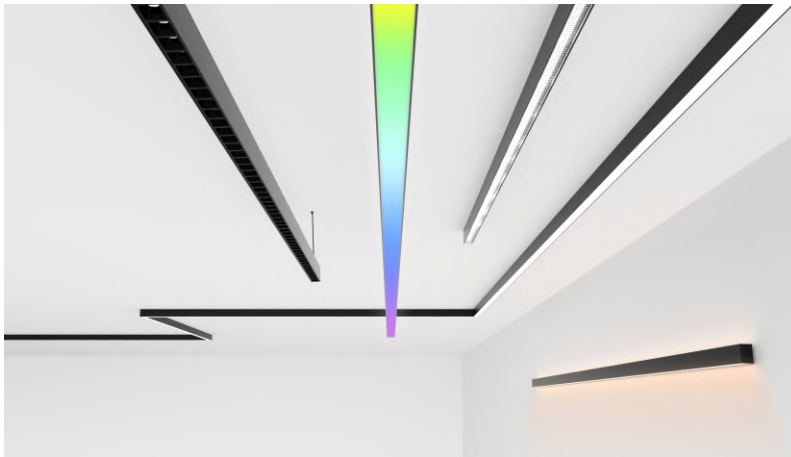

LINERA LIGHT SYSTEM

The linear lighting systems feature a strong profile for a nearly hair thin connection in continuous runs. Available in lengths of 600-2400mm, as well as custom options. High efficiency (115-130 lm/w) is delivered, with CCT switchable from 3000K to 4000K to suit different indoor settings. Various designs can be formed using L, X, and T joints, with full mounting options pendant, wall, surface, as well as wide range of accessories to provide maximum flexibility.

DETAILS



Scan to know more about product information