



DESCRIPTION

OVEGA(EN-TLO series, premium version) is a stylish and compact LED track light that will fit smoothly into any retail, gallery environments. High lumen efficiency(>110lm/W) & versatile optical accessories can increase the great light comfort and fulfill different light demands. The head can be adjusted precisely 360°+ horizontal(rotation) and 90° vertical without dead angle. The light, as a result, is emitted exactly where you need it. The integrated driver gives clean feeling and the ceiling will not be cluttered with drivers aimed in different directions.

FEATURES


- Stylish and compact design with integrated driver.
- Excellent modular combination concept: integrated driver + different fixture bases + optical accessories, DIY to get different light solutions and easy for maintenance.
- Light efficiency is up to 110lm/W.
- Interchangeable lens: 15°, 18°, 24°, 38°, 60°.
- Can be dressed in 6 kinds of optical accessories to enhance the visual quality, reduce glare and cut off the light.
- Privately-designed joints can hold the track head at any positions without malfunctions.
- 360°+ rotation without dead angle and 90°vertical aiming.
- Use OVEGA family to get an unified impression in one environment.

SPECIFICATION

INPUT VOLTAGE	220-240V / 100-120V / 100-277V AC, 50-60Hz
DIMMABLE	Phase 0/1-10V DALI
BEAM ANGLE	15°, 18°, 24°, 38°, 60°
HOUSING COLOR	White, black, silver
OPERATING TEMPERATURE RANGE	-20~+45°C



DETAILS

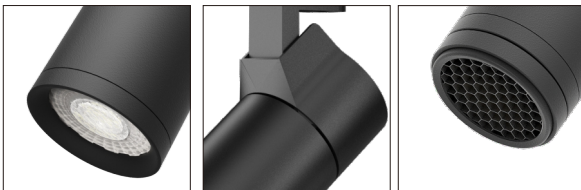


High Lumen efficiency
>110lm/W

Very reliable joint

Variety optical
accessories for choice

DIMENSION

EN-TLO020-21
EN-TLO025-21
EN-TLO030-21



3-pin track adaptor

4-pin track adaptor

OPTICAL ACCESSORIES


Accessories



MODEL NUMBER	POWER	COLOR TEMP	LUMINOUS FLUX(Lm)±5%	LUMINOUS FLUX(Lm)
EN-TLO020-21	20W	3000K	2522lm(CRI80+)	2270lm(CRI90+)
EN-TLO020-22			2627lm(CRI80+)	2364lm(CRI90+)
EN-TLO020-23		4000K	2627lm(CRI80+)	2364lm(CRI90+)
EN-TLO020-24				
EN-TLO025-21	25W	3000K	2884lm(CRI80+)	2146lm(CRI90+)
EN-TLO025-22			3004lm(CRI80+)	2703lm(CRI90+)
EN-TLO025-23		4000K	3004lm(CRI80+)	2703lm(CRI90+)
EN-TLO025-24				
EN-TLO030-21	30W	3000K	3246lm(CRI80+)	2921lm(CRI90+)
EN-TLO030-22			3381lm(CRI80+)	3043lm(CRI90+)
EN-TLO030-23		4000K	3381lm(CRI80+)	3043lm(CRI90+)
EN-TLO030-24				


EN-TLO020/025/030-21: Premium version.
EN-TLO020/025/030-22: Surface-mounted.
EN-TLO020/025/030-23: Suspending.
EN-TLO020/025/030-24: Wall-mounted.

LIGHT DISTRIBUTION

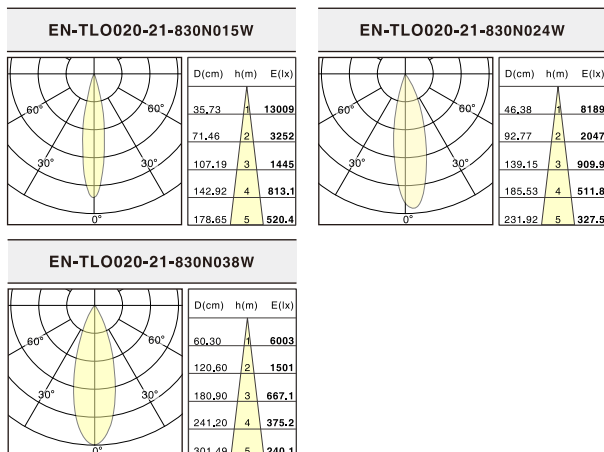


INSTALLATION


On Track




3-circuit 4 pin



Standard




Global



3 pin



Halo



2 pin



Juno



Lightolier

Surface-mounted

EN-TLO020-22
EN-TLO025-22
EN-TLO030-22



Suspending

EN-TLO020-23
EN-TLO025-23
EN-TLO030-23



Wall-mounted

EN-TLO020-24
EN-TLO025-24
EN-TLO030-24



PACKAGE

Model	EN-TLO020/025/030-21
PCS/Carton	15
Inner Box size(cm)	11.5*11.0*26.2
Carton size(cm)	56.5*36*28.5
Net weight(kg)	12.2
Gross weight(kg)	14.6

OVEGA FAMILY

UNLIMITED POSSIBILITIES with OVEGA family. Seven versions in excellent modular combination concept with similar appearances but different light solutions entitle OVEGA family will fit smoothly into any retails, museums and galleries environment.

In versions with different light solutions, OVEGA covers high performance accent lighting with very narrow beam 6°, different interchangeable beam lens & different optical accessories, flood lighting of exhibits, beam angle adjusting from narrow to wide, wall washing and projection.

Except versatile light solutions, OVEGA is also a complete family with different installation methods(track-mounted, pendant, surface-mounted and wall-mounted). So, if you have an environment where ask for different light solutions & different installation methods, OVEGA family will be a great choice to get an unified impression.

